
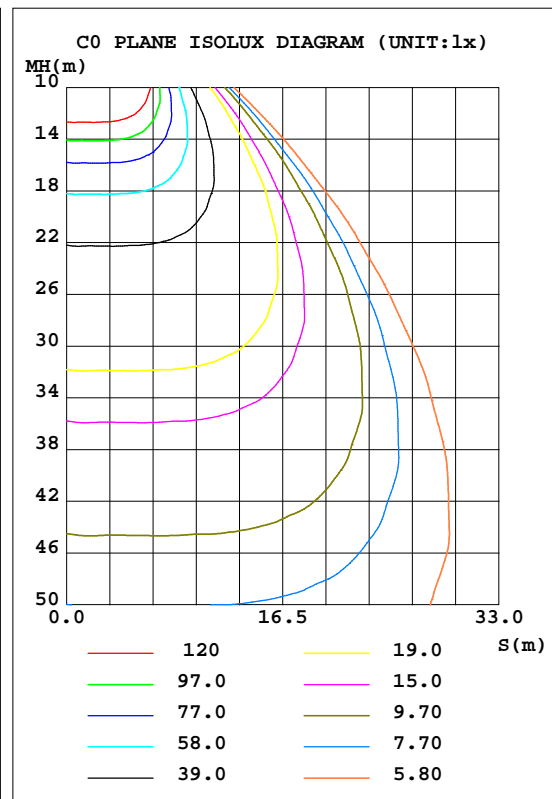


LUMINAIRE PHOTOMETRIC TEST REPORT

Test:U:219.7V I:1.336A P:291.0W PF:0.9913 Lamp Flux:37243.6x1 lm		
NAME: HIGH BAY LIGHT	TYPE:	WEIGHT:
SPEC.:PHILIPS LUMILEDS	DIM.:	SERIAL No.:BLD20171221P02
MFR.: Qinhan Lighting	SUR.:0.165*0.165*3.14	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 127.98 lm/W			
MODEL	QH-HBZSL-300W	I _{max} (cd)	22477	S/MH(C0/180)	1.27
NOMINAL POWER(W)	300	LOR(%)	100.0	S/MH(C90/270)	1.27
RATED VOLTAGE(V)		TOTAL FLUX(lm)	37244	η UP, DN(C0-180)	0.0,49.7
NOMINAL FLUX(lm)	37243.6	CIE CLASS	DIRECT	η UP, DN(C180-360)	0.0,50.3
LAMPS INSIDE	1	η up(%)	0.0	CIBSE SHR NOM	1.25
TEST VOLTAGE(V)		η down(%)	100.0	CIBSE SHR MAX	1.30

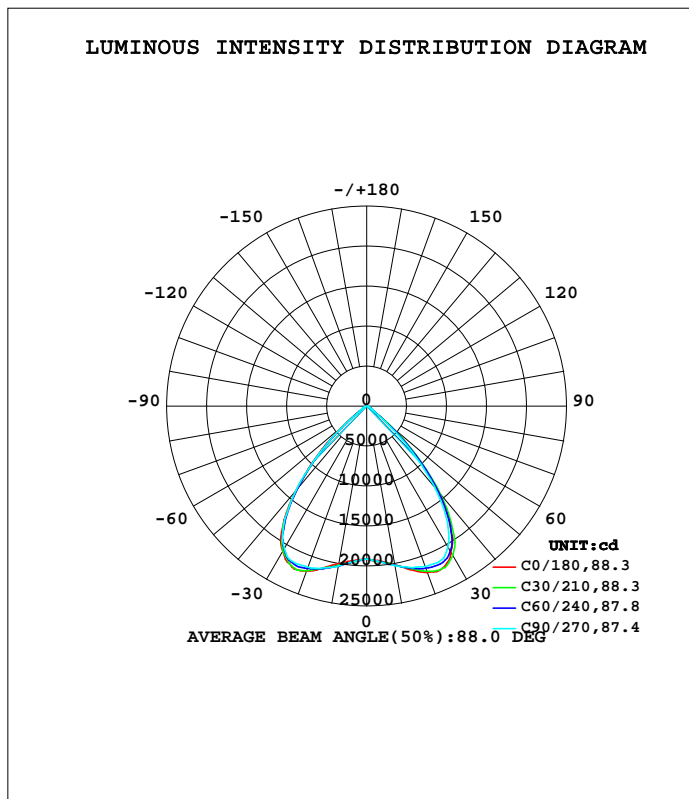

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:17DEG
 Operators:HUA
 Test Date:2017-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:31%
 Test Distance:12.218m [K=1.0000]
 Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum,lamp
10	2015	2018	2025	2017	2001	2025	2030	2009	0- 10	1884	1884	5.06,5.06
20	2215	2193	2134	2168	2195	2170	2145	2170	10- 20	5965	7850	21.1,21.1
30	2111	2130	2033	2042	2096	2061	2060	2102	20- 30	10039	17889	48,48
40	1383	1424	1319	1296	1381	1338	1371	1426	30- 40	11120	29009	77.9,77.9
50	404.7	412.3	315.4	317.0	400.1	336.8	365.4	429.9	40- 50	6529	35538	95.4,95.4
60	56.53	63.27	65.02	57.17	55.06	61.85	66.19	62.39	50- 60	1244	36781	98.8,98.8
70	19.48	20.41	16.63	14.76	18.23	18.73	17.27	19.59	60- 70	388.1	37170	99.8,99.8
80	0.6380	0.7684	0.6390	0.5445	0.5996	0.5873	0.5803	0.6613	70- 80	70.57	37240	100,100
90	0.2876	0.2775	0.2798	0.3064	0.1460	0.1487	0.1394	0.1343	80- 90	3.535	37244	100,100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:×10cd									UNIT:lm		

Conical surface Flux(90deg): 33112 lm

%lum = 88.9%
%lamp = 88.9%

Conical surface Flux(120deg): 36781 lm


%lum = 98.8%
%lamp = 98.8%

C Range: 0 - 360DEG
C Interval: 15.0DEG
Test Speed: HIGH
Temperature:17DEG
Operators:HUA
Test Date:2017-12-21

γ Range: 0 - 90DEG
γ Interval: 1.0DEG
Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
Humidity:31%
Test Distance:12.218m [K=1.0000]
Remarks:

LUMINANCE LIMITATION CURVES

Test:U:219.7V I:1.336A P:291.0W PF:0.9913 Lamp Flux:37243.6x1 lm		
NAME: HIGH BAY LIGHT	TYPE:	WEIGHT:
SPEC.:PHILIPS LUMILEDS	DIM.:	SERIAL No.:BLD20171221P02
MFR.: Qinhan Lighting	SUR.:0.165*0.165*3.14	Shielding Angle:

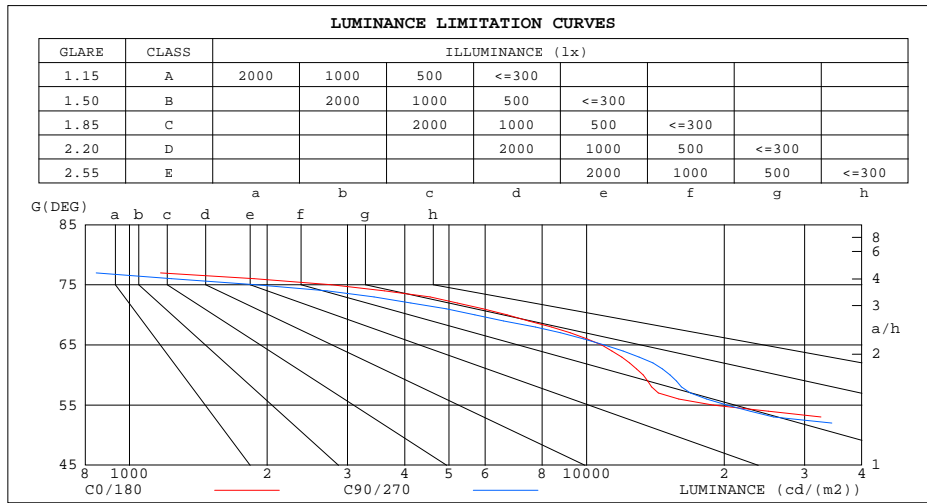

LUMINANCE cd/(m2)		
G(DEG)	C0/180	C90/270
85	423	426
80	432	431
75	2765	1890
70	6701	5699
65	10784	10929
60	13304	15239
55	18942	20317
50	74087	57495
45	142858	132157


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:17DEG
 Operators:HUA
 Test Date:2017-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:31%
 Test Distance:12.218m [K=1.0000]
 Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:219.7V I:1.336A P:291.0W PF:0.9913 Lamp Flux:37243.6x1 lm		
NAME: HIGH BAY LIGHT	TYPE:	WEIGHT:
SPEC.:PHILIPS LUMILEDS	DIM.:	SERIAL No.:BLD20171221P02
MFR.: Qinhan Lighting	SUR.:0.165*0.165*3.14	Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Coefficients of Utilization(CU)									
0.0	1.19	1.19	1.19	1.16	1.16	1.16	1.11	1.11	1.11	1.06	1.06	1.06	1.02	1.02	1.02	1.00
1.0	1.09	1.07	1.04	1.07	1.05	1.02	1.03	1.01	.99	.99	.98	.96	.96	.95	.93	.92
2.0	1.00	.95	.91	.98	.94	.90	.95	.91	.88	.92	.89	.86	.89	.87	.85	.83
3.0	.91	.86	.81	.90	.85	.80	.87	.83	.79	.85	.81	.78	.82	.79	.76	.75
4.0	.84	.77	.72	.83	.77	.72	.80	.75	.71	.78	.74	.70	.76	.72	.69	.68
5.0	.77	.70	.65	.76	.69	.65	.74	.68	.64	.72	.67	.63	.71	.66	.63	.61
6.0	.71	.64	.59	.70	.63	.58	.68	.62	.58	.67	.62	.58	.65	.61	.57	.55
7.0	.65	.58	.53	.65	.58	.53	.63	.57	.53	.62	.56	.52	.61	.56	.52	.50
8.0	.60	.53	.48	.60	.53	.48	.59	.52	.48	.57	.52	.48	.56	.51	.48	.46
9.0	.56	.49	.44	.55	.49	.44	.54	.48	.44	.53	.48	.44	.52	.47	.44	.42
10.0	.52	.45	.41	.52	.45	.41	.51	.45	.41	.50	.44	.40	.49	.44	.40	.39

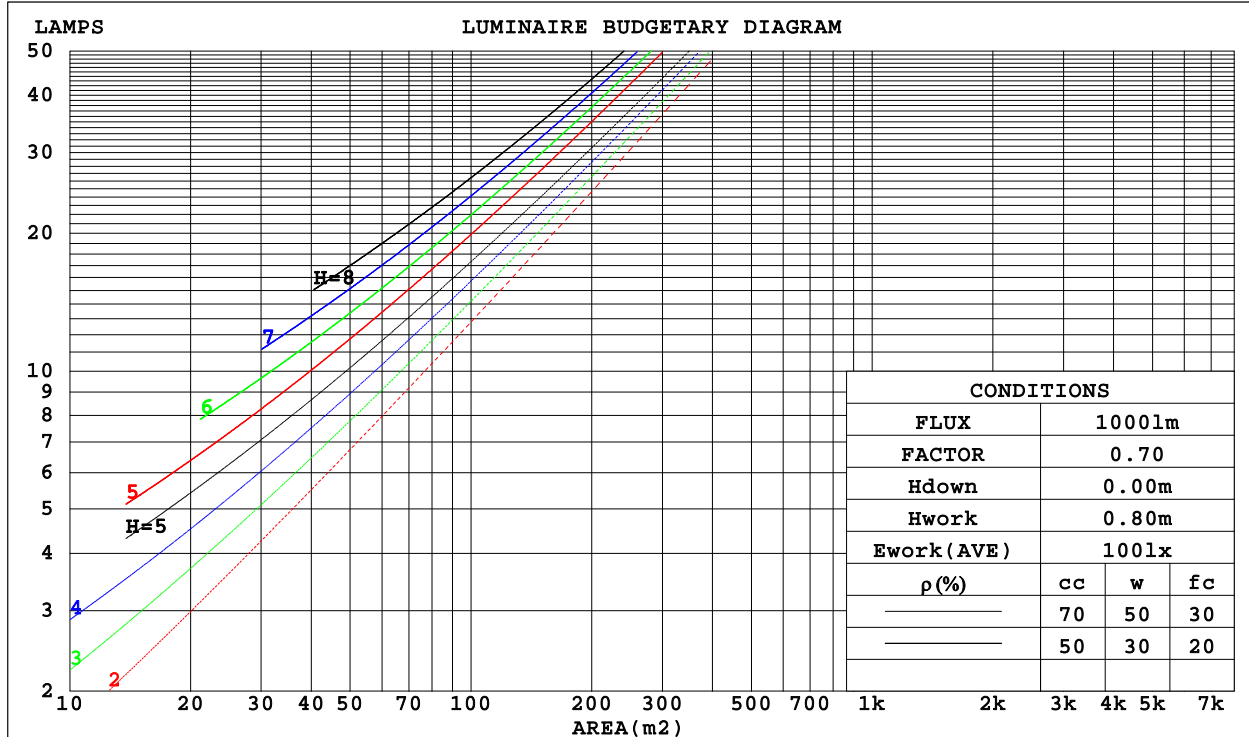

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:17DEG
 Operators:HUA
 Test Date:2017-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:31%
 Test Distance:12.218m [K=1.0000]
 Remarks:

WEC AND CCEC

Test:U:219.7V I:1.336A P:291.0W PF:0.9913 Lamp Flux:37243.6x1 lm		
NAME: HIGH BAY LIGHT	TYPE:	WEIGHT:
SPEC.:PHILIPS LUMILEDS	DIM.:	SERIAL No.:BLD20171221P02
MFR.: Qinhan Lighting	SUR.:0.165*0.165*3.14	Shielding Angle:

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)									
0.0																
1.0	.205	.116	.037	.198	.113	.036	.185	.106	.034	.173	.100	.032	.163	.094	.030	
2.0	.200	.110	.034	.194	.107	.033	.183	.102	.032	.173	.097	.030	.164	.093	.029	
3.0	.192	.102	.031	.187	.100	.030	.178	.096	.029	.169	.093	.028	.161	.089	.028	
4.0	.184	.096	.028	.180	.094	.028	.171	.091	.027	.164	.088	.027	.157	.085	.026	
5.0	.176	.090	.026	.172	.088	.026	.165	.086	.025	.158	.083	.025	.152	.081	.024	
6.0	.168	.084	.024	.164	.083	.024	.158	.081	.024	.152	.079	.023	.146	.077	.023	
7.0	.160	.079	.022	.157	.078	.022	.151	.076	.022	.146	.075	.022	.141	.073	.021	
8.0	.153	.075	.021	.150	.074	.021	.145	.072	.021	.140	.071	.020	.135	.069	.020	
9.0	.146	.071	.020	.143	.070	.020	.139	.069	.019	.134	.067	.019	.130	.066	.019	
10.0	.139	.067	.019	.137	.066	.018	.133	.065	.018	.129	.064	.018	.125	.063	.018	

pcc	80%			70%			50%			30%			10%			0
pw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
pfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.190	.190	.190	.163	.163	.163	.111	.111	.111	.064	.064	.064	.020	.020	.020	
1.0	.173	.157	.143	.148	.135	.123	.101	.093	.085	.058	.054	.049	.019	.017	.016	
2.0	.160	.132	.109	.137	.114	.094	.094	.079	.066	.054	.046	.039	.017	.015	.013	
3.0	.150	.114	.085	.128	.098	.074	.088	.068	.052	.051	.040	.031	.016	.013	.010	
4.0	.141	.100	.068	.121	.086	.059	.083	.060	.042	.048	.035	.025	.015	.011	.008	
5.0	.133	.088	.055	.114	.076	.048	.079	.053	.034	.046	.031	.020	.015	.010	.007	
6.0	.127	.080	.046	.109	.069	.040	.075	.048	.028	.044	.028	.017	.014	.009	.006	
7.0	.121	.072	.039	.104	.063	.034	.072	.044	.024	.042	.026	.014	.013	.008	.005	
8.0	.115	.066	.033	.099	.058	.029	.069	.040	.020	.040	.024	.012	.013	.008	.004	
9.0	.110	.062	.029	.095	.053	.025	.066	.038	.018	.038	.022	.011	.012	.007	.003	
10.0	.106	.057	.025	.091	.050	.022	.063	.035	.016	.037	.021	.009	.012	.007	.003	

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:17DEG
 Operators:HUA
 Test Date:2017-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:31%
 Test Distance:12.218m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:219.7V I:1.336A P:291.0W PF:0.9913 Lamp Flux:37243.6x1 lm										
NAME: HIGH BAY LIGHT					TYPE:			WEIGHT:		
SPEC.:PHILIPS LUMILEDS					DIM.:			SERIAL No.:BLD20171221P02		
MFR.: Qinhan Lighting					SUR.:0.165*0.165*3.14			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.5	27.6	26.7	27.8	28.0	26.2	27.3	26.4	27.5	27.7
3H	26.3	27.4	26.6	27.6	27.8	26.0	27.1	26.3	27.3	27.5
4H	26.2	27.2	26.5	27.4	27.7	25.9	26.9	26.2	27.1	27.4
6H	26.1	27.0	26.4	27.3	27.6	25.8	26.7	26.1	27.0	27.2
8H	26.1	27.0	26.4	27.2	27.5	25.8	26.7	26.1	26.9	27.2
12H	26.0	26.9	26.4	27.2	27.4	25.7	26.6	26.1	26.8	27.1
4H 2H	26.2	27.2	26.5	27.4	27.7	25.9	26.9	26.2	27.1	27.4
3H	26.1	26.9	26.4	27.2	27.5	25.8	26.6	26.1	26.9	27.2
4H	26.0	26.7	26.3	27.0	27.4	25.7	26.4	26.0	26.7	27.1
6H	25.9	26.6	26.3	26.9	27.2	25.6	26.3	26.0	26.6	26.9
8H	25.8	26.5	26.2	26.8	27.2	25.5	26.2	25.9	26.5	26.9
12H	25.8	26.4	26.2	26.7	27.1	25.5	26.1	25.9	26.4	26.8
8H 4H	25.8	26.5	26.2	26.8	27.2	25.5	26.2	25.9	26.5	26.9
6H	25.7	26.2	26.2	26.6	27.1	25.4	25.9	25.9	26.3	26.8
8H	25.7	26.1	26.1	26.6	27.0	25.4	25.8	25.8	26.3	26.7
12H	25.7	26.0	26.1	26.5	26.9	25.3	25.7	25.8	26.2	26.6
12H 4H	25.8	26.4	26.2	26.7	27.1	25.5	26.1	25.9	26.4	26.8
6H	25.7	26.1	26.1	26.6	27.0	25.4	25.8	25.8	26.3	26.7
8H	25.7	26.0	26.1	26.5	26.9	25.3	25.7	25.8	26.2	26.6
Variations with the observer position at spacings:										
S = 1.0H	+ 2.5 / -10.9					+ 2.5 / -10.4				
1.5H	+ 3.2 / - 9.5					+ 3.3 / - 9.0				
2.0H	+ 6.2 / - 8.5					+ 6.3 / - 7.3				


CIE Pub.117 Corrected 37244 lm Total Lamp Luminous Flux.(8log(F/F0) = 12.6)

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:17DEG
 Operators:HUA
 Test Date:2017-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:31%
 Test Distance:12.218m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:219.7V I:1.336A P:291.0W PF:0.9913 Lamp Flux:37243.6x1 lm		
NAME: HIGH BAY LIGHT	TYPE:	WEIGHT:
SPEC.:PHILIPS LUMILEDS	DIM.:	SERIAL No.:BLD20171221P02
MFR.: Qinhan Lighting	SUR.:0.165*0.165*3.14	Shielding Angle:

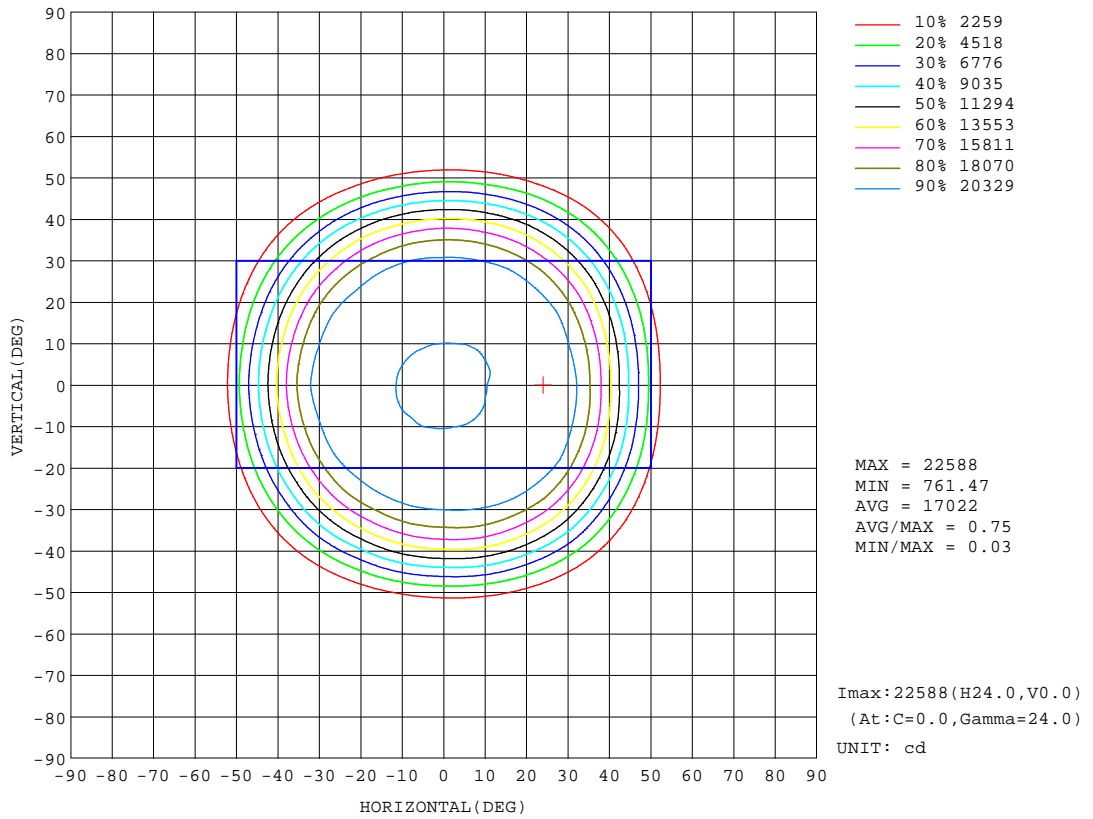


C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:17DEG
 Operators:HUA
 Test Date:2017-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:31%
 Test Distance:12.218m [K=1.0000]
 Remarks:

AAI Figure

Test:U:219.7V I:1.336A P:291.0W PF:0.9913 Lamp Flux:37243.6x1 lm		
NAME: HIGH BAY LIGHT	TYPE:	WEIGHT:
SPEC.:PHILIPS LUMILEDS	DIM.:	SERIAL No.:BLD20171221P02
MFR.: Qinhan Lighting	SUR.:0.165*0.165*3.14	Shielding Angle:

Flux out:32418 lm

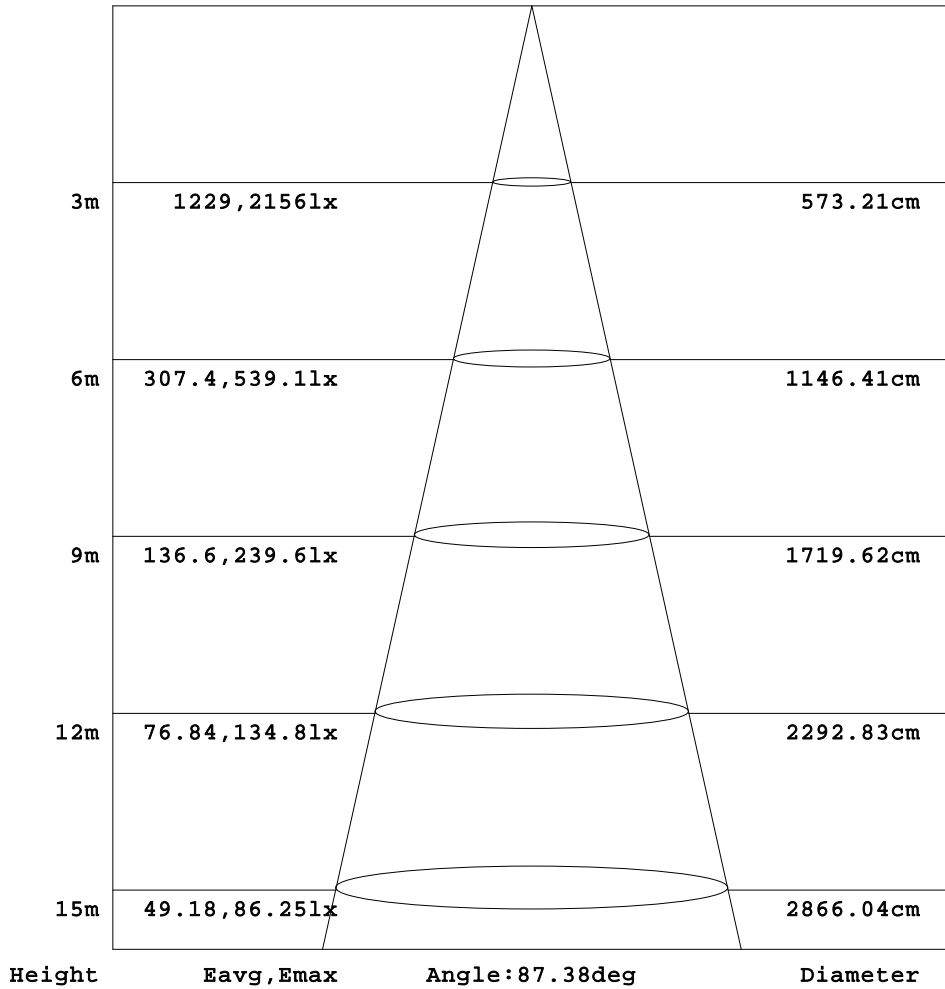


Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:17DEG
 Operators:HUA
 Test Date:2017-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:31%
 Test Distance:12.218m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:219.7V I:1.336A P:291.0W PF:0.9913 Lamp Flux:37243.6x1 lm		
NAME: HIGH BAY LIGHT	TYPE:	WEIGHT:
SPEC.:PHILIPS LUMILEDS	DIM.:	SERIAL No.:BLD20171221P02
MFR.: Qinhan Lighting	SUR.:0.165*0.165*3.14	Shielding Angle:

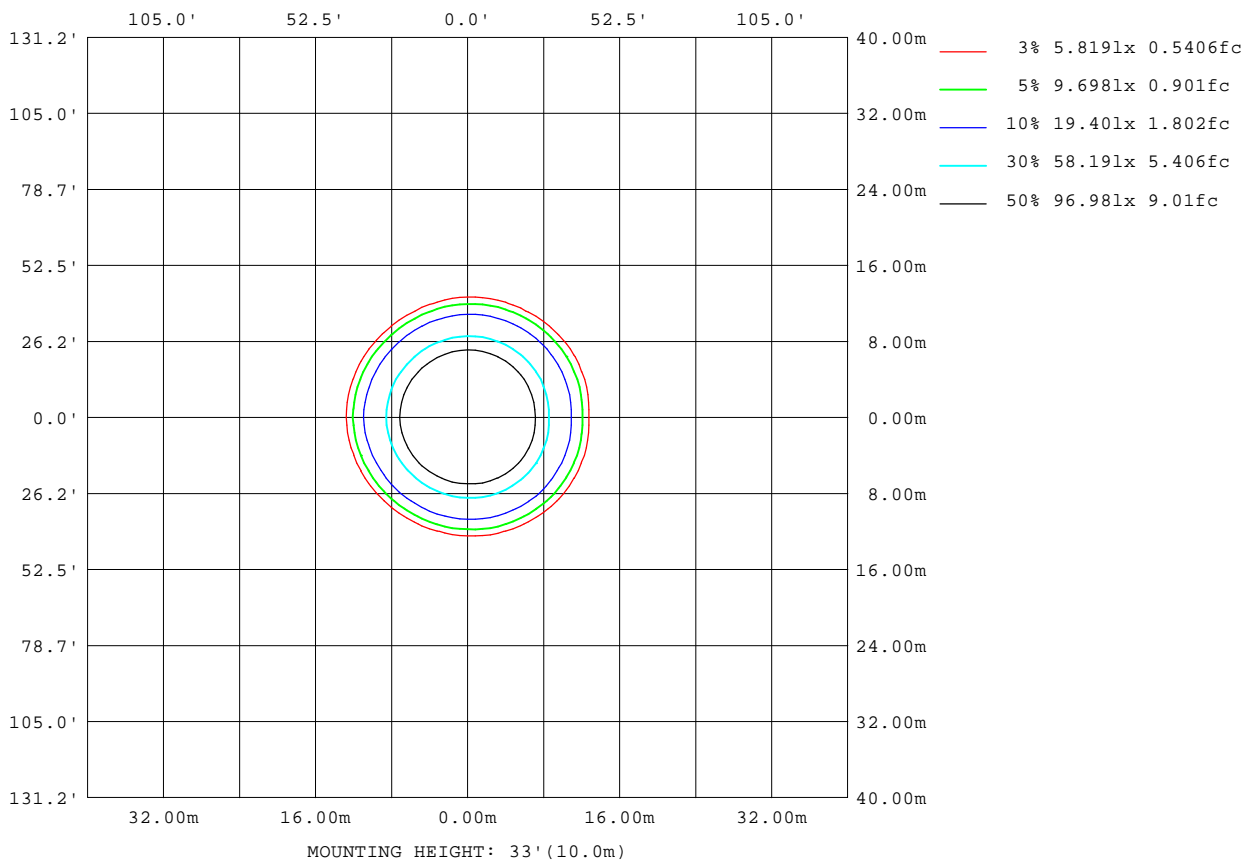

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:17DEG
 Operators:HUA
 Test Date:2017-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:31%
 Test Distance:12.218m [K=1.0000]
 Remarks:

LED Avg.L Report

Test:U:219.7V I:1.336A P:291.0W PF:0.9913 Lamp Flux:37243.6x1 lm		
NAME: HIGH BAY LIGHT	TYPE:	WEIGHT:
SPEC.:PHILIPS LUMILEDS	DIM.:	SERIAL No.:BLD20171221P02
MFR.: Qinhan Lighting	SUR.:0.165*0.165*3.14	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	10576
L_0~180(75)av	2696
L_0~180(85)av	373
L_90~270(65)av	11153
L_90~270(75)av	1997
L_90~270(85)av	373
L_45(65)av	10942
L_45(75)av	2496
L_45(85)av	378

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:17DEG
 Operators:HUA
 Test Date:2017-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:31%
 Test Distance:12.218m [K=1.0000]
 Remarks:

Planar Illuminance Curve

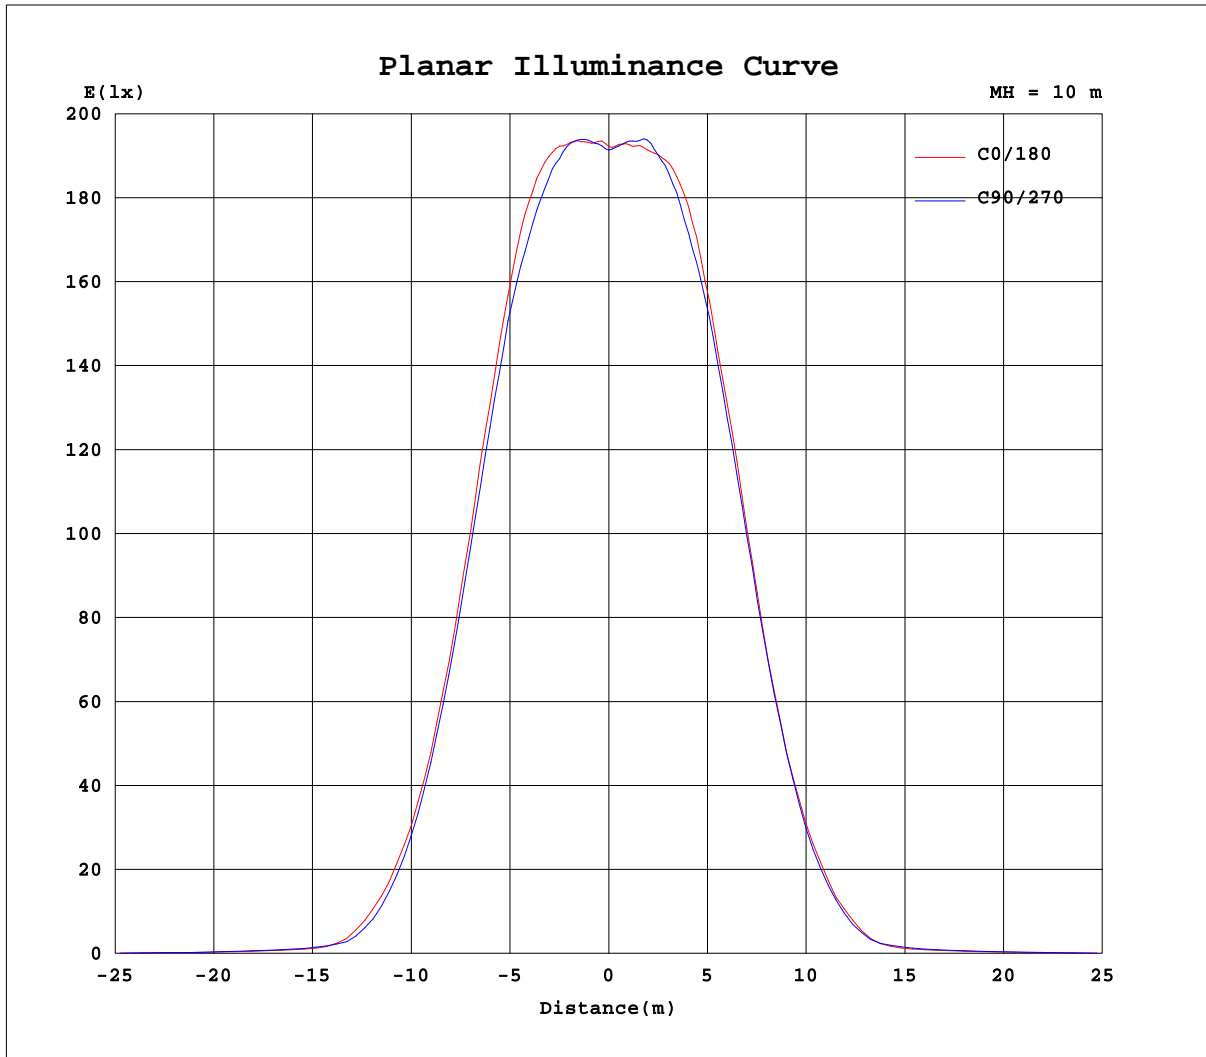

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature: 17DEG
 Operators: HUA
 Test Date: 2017-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity: 31%
 Test Distance: 12.218m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.7V I:1.336A P:291.0W PF:0.9913 Lamp Flux:37243.6x1 lm		
NAME: HIGH BAY LIGHT	TYPE:	WEIGHT:
SPEC.:PHILIPS LUMILEDS	DIM.:	SERIAL No.:BLD20171221P02
MFR.: Qinhan Lighting	SUR.:0.165*0.165*3.14	Shielding Angle:

Table--1

UNIT: x10cd

C(DEG) γ (DEG)	0	15	30	45	60	75	90	105	120	135	150	165	180	195	210	225	240	255	270
0	1913	1913	1913	1913	1913	1913	1913	1913	1913	1913	1913	1913	1913	1913	1913	1913	1913	1913	1913
5	1943	1948	1956	1955	1955	1954	1955	1952	1949	1950	1952	1949	1942	1947	1955	1957	1954	1955	1953
10	2015	2024	2020	2018	2021	2028	2025	2021	2015	2017	2009	2013	2001	2011	2018	2025	2032	2031	2030
15	2117	2111	2100	2098	2095	2087	2087	2085	2085	2094	2095	2098	2094	2094	2101	2103	2104	2096	2094
20	2215	2205	2198	2193	2158	2133	2134	2139	2145	2168	2194	2192	2195	2187	2190	2170	2162	2158	2145
25	2240	2238	2242	2223	2180	2155	2145	2155	2156	2180	2214	2206	2216	2208	2211	2193	2175	2171	2156
30	2111	2152	2153	2130	2092	2063	2033	2034	2033	2042	2075	2089	2096	2094	2093	2061	2067	2074	2060
35	1820	1864	1874	1880	1827	1802	1759	1751	1733	1761	1779	1808	1832	1817	1821	1803	1787	1796	1808
40	1383	1412	1434	1424	1398	1368	1319	1299	1280	1296	1321	1347	1381	1367	1364	1338	1349	1345	1371
45	858	906	904	912	873	848	797	784	763	789	790	833	871	851	829	820	820	826	845
50	405	430	423	412	374	355	315	309	295	317	338	371	400	381	364	337	328	342	365
55	92.3	101	107	113	109	106	99.4	96.2	91.5	89.0	86.2	87.4	94.0	91.1	95.9	96.2	99.2	103	106
60	56.5	58.8	60.2	63.3	65.2	66.6	65.0	63.2	59.9	57.2	54.1	54.2	55.1	57.5	60.3	61.8	63.2	64.7	66.2
65	38.7	40.0	41.1	42.2	41.8	41.7	39.4	37.3	35.5	34.5	33.4	34.8	37.6	39.5	42.0	40.3	39.9	39.8	41.1
70	19.5	20.1	20.3	20.4	19.4	17.9	16.6	15.5	14.9	14.8	14.6	16.2	18.2	19.8	20.5	18.7	17.6	16.7	17.3
75	6.08	6.77	6.66	6.61	5.69	4.88	4.18	3.75	3.33	3.73	4.02	4.66	5.84	6.32	6.10	5.16	4.52	4.37	4.65
80	0.64	0.71	0.73	0.77	0.74	0.70	0.64	0.60	0.56	0.54	0.53	0.57	0.60	0.62	0.63	0.59	0.58	0.57	0.58
85	0.31	0.32	0.35	0.35	0.35	0.33	0.32	0.30	0.29	0.28	0.29	0.29	0.24	0.25	0.24	0.24	0.23	0.24	0.24
90	0.29	0.29	0.27	0.28	0.27	0.28	0.28	0.29	0.30	0.31	0.30	0.31	0.15	0.15	0.15	0.15	0.15	0.14	0.14

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:17DEG
 Operators:HUA
 Test Date:2017-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:31%
 Test Distance:12.218m [K=1.0000]
 Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:219.7V I:1.336A P:291.0W PF:0.9913 Lamp Flux:37243.6x1 lm		
NAME: HIGH BAY LIGHT	TYPE:	WEIGHT:
SPEC.:PHILIPS LUMILEDS	DIM.:	SERIAL No.:BLD20171221P02
MFR.: Qinhan Lighting	SUR.:0.165*0.165*3.14	Shielding Angle:

Table--2

UNIT: x10cd

C(DEG) γ (DEG)	285	300	315	330	345														
0	1913	1913	1913	1913	1913														
5	1952	1949	1950	1950	1950														
10	2025	2015	2009	2011	2017														
15	2093	2088	2087	2089	2104														
20	2136	2153	2170	2177	2196														
25	2158	2179	2202	2228	2233														
30	2078	2097	2102	2117	2122														
35	1820	1840	1856	1858	1850														
40	1392	1421	1426	1442	1410														
45	875	903	917	916	905														
50	383	409	430	436	437														
55	109	110	109	109	99.6														
60	66.2	65.3	62.4	59.4	57.1														
65	41.9	42.0	41.0	40.0	39.1														
70	18.1	19.1	19.6	19.7	19.6														
75	5.17	6.04	6.57	6.92	6.68														
80	0.59	0.64	0.66	0.67	0.65														
85	0.25	0.25	0.26	0.26	0.26														
90	0.13	0.13	0.13	0.13	0.15														

C Range: 0 - 360DEG
 C Interval: 15.0DEG
 Test Speed: HIGH
 Temperature:17DEG
 Operators:HUA
 Test Date:2017-12-21

γ Range: 0 - 90DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE GO-2000B_V1 SYSTEM V2.0.350
 Humidity:31%
 Test Distance:12.218m [K=1.0000]
 Remarks: