



for

LED




EtraLED

EtraLED-PRO-13050 Prolight Modular Passive Star LED Heat Sink Φ 130mm


Features VS Benefits

- * The EtraLED-PRO-13050 Prolight Modular Passive Star LED Heat Sinks are specifically designed for luminaires using the Prolight LED engines.
- * Mechanical compatibility with direct mounting of the LED engines to the LED cooler and thermal performance matching the lumen packages.
- * For spotlight and downlight designs from 2700 to 6800 lumen.
- * Thermal resistance range R_{th} 0.9°C/W.
- * Modular design with mounting holes foreseen for direct mounting of Prolight COB series LED engines.
- * Diameter 130mm - standard height 50mm Other heights on request.
- * Extruded from highly conductive aluminum.

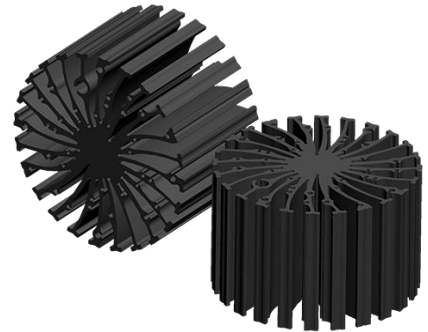

Zhaga LED engine and radiator assembly is a unified future international standardization

- * Below you find an overview of Prolight COB's and LED modules which standard fit on the EtraLED Star LED Heat Sinks.
- * In this way mechanical after work and related costs can be avoided, and lighting designers can standardize their designs on a limited number of Star LED Heat Sinks.

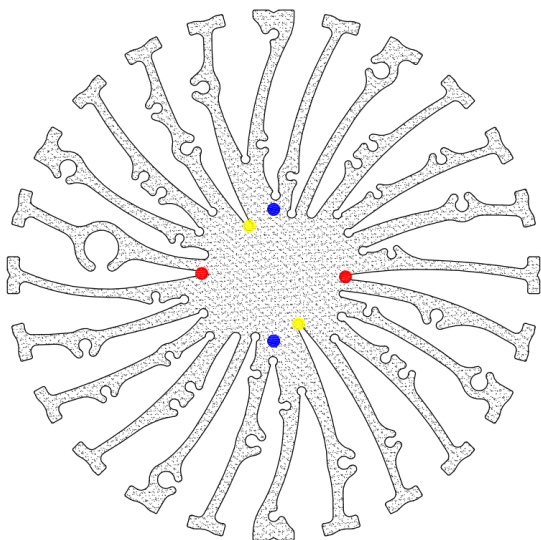

Prolight LED engines Mounting Options

COB BI Series Modules names:

- PABA-26xxx-xxxx ;
- PABA-35xxx-xxxx ;
- PABA 50xxx-xxxx ;

With Zhaga Book 3 for green indicator marks:
 BJB Holder:47.319.2040.50;
 Direct mounting with machine screws M3x8mm;
 Without LED holders for yellow indicator marks.
 Direct mounting with machine screws M3x6mm;

COB CIII Series Modules names:

- PACC-40xxx-xxxx ;

With Zhaga Book 3 for green indicator marks:
 BJB Holder:47.319.2030.50;
 Direct mounting with machine screws M3x8mm;
 Without LED holders for blue indicator marks.
 Direct mounting with machine screws M3x6mm;



for

LED



EtraLED

EtraLED-PRO-13050 Prolight Modular Passive Star LED Heat Sink Φ 130mm

Mounting Options and Drawings & Dimensions

Example: EtraLED-PRO-13050-B-3

Example: EtraLED-PRO-130 **1** - **2** - **3**

1 Height (mm)

2 Anodising Color

B-Black

C-Clear

Z-Custom

3 Mounting Options - see graphics for details Combinations available

Ex.order code - 12



means option 1 and 2 combined



Notes:

- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MingfaTech.
- MingfaTech reserves the right to change products or specifications without prior notice.

MOUNTING OPTION	Module type	Holder NO.	THREAD	THREAD DEPTH	THREAD HOLE DISTANCE
1	COB BI Series COB CII Series	/	M3	8mm	26.8mm/ 2-@180°
2	COB CIII Series	/	M3	8mm	32.2mm/ 2-@180°
3	COB CII Series	BJB 47.319.2021.50	M3	8mm	35.0mm/ 2-@180° Zhaga Book3
	COB CIII Series	BJB 47.319.2030.50			
	COB BI Series	BJB 47.319.2040.50			

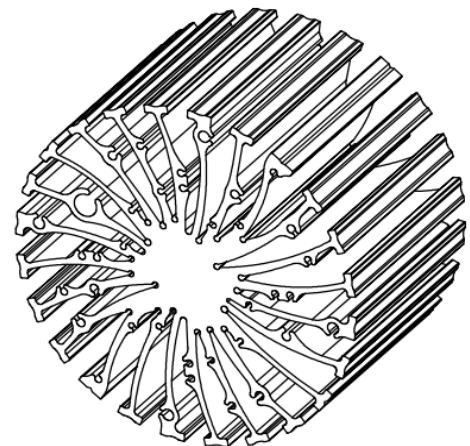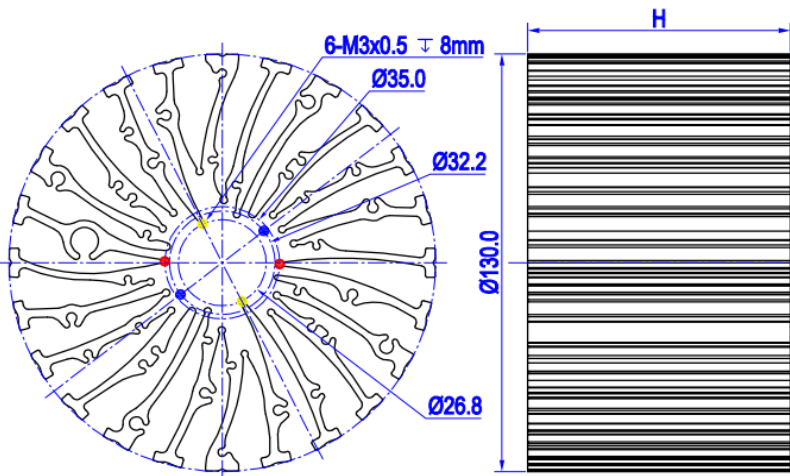

EtraLED

EtraLED-PRO-13050 Prolight Modular Passive Star LED Heat Sink Φ130mm

The thermal data table

	 <i>EtraLED-13050</i>
Model No.	EtraLED-PRO-13050
Size	Φ130xH50mm
Material	AL6063-T5
Finish	Black Anodized
Weight(gr)	684.0
Thermal Wattage	56.5W
HeatsinkΘs-a²	157205
Heat Sink T Rise Above Ambient	0.9

Dissipated Power Pd(W)	Pd = Pe x (1-ηL)	Heat sink to ambient thermal resistance Rhs-amb (°C/W)	Heat sink to ambient temperature rise Ths-amb (°C)
		EtraLED-PRO-13050	EtraLED-PRO-13050
12		1.40	17.00
24		1.25	30.00
35		1.15	40.00
47		1.00	47.00
58		0.90	52.00
70		0.80	63.00

