

General Specifications

Speed: 0-3000RPM
 Insulation Resistance: 100MIN, 500VDC
 Ambient Temperature: (0-55)°C
 Encoder lines: 2500/1000


Picture



Electrical Specification


Series Model	Rated Voltage (V)	L (mm)	Phase Current (A)	Phase Resistance (Ω)	Phase Inductance (mH)	Holding Torque (N.cm)	Moment of Inertia (g.cm ²)	Motor Weight (g)
HS601-09030A	1.8	45	3.0	0.6	1.3	90	140	850
HS601-09042A	1.26	45	4.2	0.3	1.3	90	140	850
HS601-16030A	2.4	56	3.0	0.8	2.4	160	320	880
HS601-16042A	1.89	56	4.2	0.45	1.2	160	320	880
HS601-26030A	3.3	90	3.0	1.1	5.0	260	800	1500
HS601-26048A	2.88	90	4.8	0.6	2.5	260	800	1500

Mechanical Dimensions

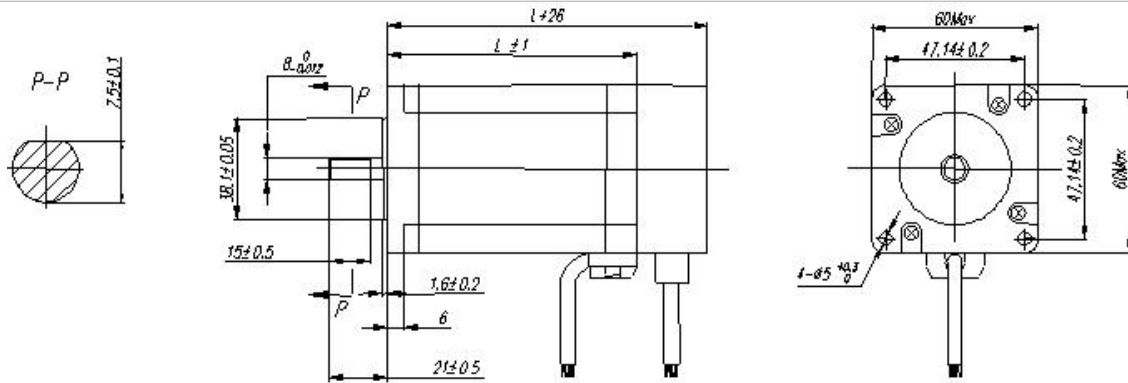

Standard Leadwire Configuration

BI-POLAR(4 LEADS)



Complementary Products:

- Special shaft
- Encoders
- Connector
- Long leadwires