




SANWAY AUDIO

<https://www.china-sanway.com>

DE900K-8 3" High Frequency Driver

SPECIFICATIONS

Throat Diameter	33 mm (1.3 in)
Nominal Impedance	8 Ω
Minimum Impedance	8.3 Ω
Nominal Power Handling ²	80 W
Continuous Power Handling ³	160 W
Sensitivity ⁴	109.5 dB
Frequency Range	1.0 - 18.0 kHz
Recommended Crossover ⁵	1.2 kHz
Voice Coil Diameter	75 mm (3.0 in)
Winding Material	Aluminium
Inductance	0.14 mH
Diaphragm Material	Titanium
Flux Density	2.05 T
Magnet Material	Neodymium Ring

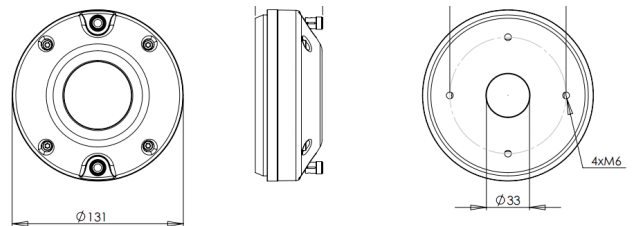

MOUNTING AND SHIPPING INFO

Four M6 holes 90° on 102 mm (4 in) diameter

Overall Diameter 131 mm (5.15 in)



Depth 52 mm (2.0 in)

Net Weight 2.6 kg (5.7 lb)

Shipping Units 4

Shipping Weight 11.0 kg (24.2 lb)

Shipping Box
295x160x180 mm (11.61x6.30x7.09 in)

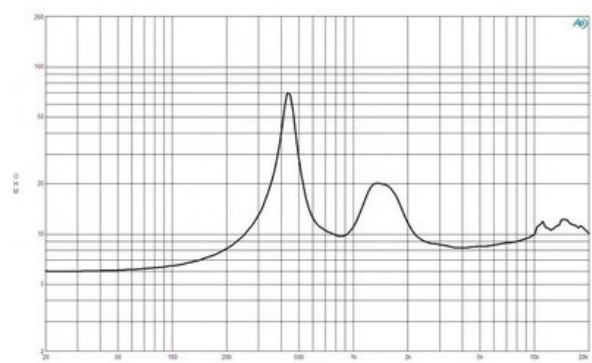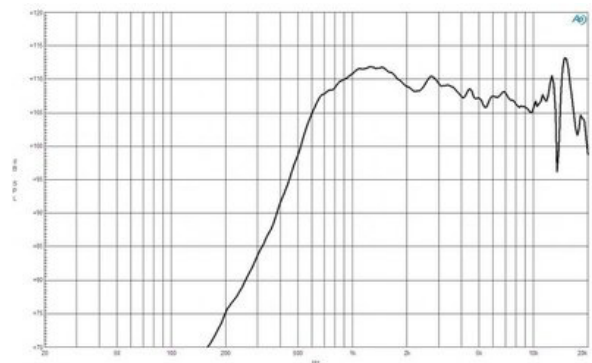

1. 2 hour test made with continuous pink noise signal within the range from the recommended crossover frequency to 20 kHz. Power calculated on rated nominal impedance.
2. Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
3. Applied RMS Voltage is set to 2.83 V for 8 ohms Nominal Impedance.
4. 12 dB/oct. or higher slope high-pass filter.