

**GERNERAL SPECIFICATIONS**

Step Angle(Accuracy )----- 0.9°(±5%)  
 Resistance Accuracy ----- ±10%  
 Inductance Accuracy ----- ±20%  
 Temperature Rise ----- 80°C Max.  
 Ambient Temperature ----- -10°C~50°C  
 Insulation Resistance ----- 100Mohm Min, 50VDC  
 Dielectric Strength ----- 500VAC for one minute  
 Shaft Radial Play ----- 0.06Max. (450 g-load)  
 Shaft Axial Play ----- 0.08Max.(450 g-load)


**Picture**



**Electrical Specification**


Series Model	Step Angle (°)	L (mm)	Rated Current (A)	Phase Resistance (Ω)	Phase Inductance (mH)	Holding Torque (N.cm)	Detent Torque (N.cm)	Lead Wire (NO.)	Motor Weight (g)
H352-00908	0.9	28	0.8	4.5	4.2	9	0.3	4	130
H352-00906	0.9	28	0.55	10	9.5	9	0.3	4	130
H352-00904	0.9	28	0.36	22	20	9	0.3	4	130
H352-00804	0.9	28	0.4	30	12	8	0.3	6	130
H352-01408	0.9	34	0.8	6	10	14	0.6	4	190
H352-01406	0.9	34	0.55	12	19	14	0.6	4	190
H352-01404	0.9	34	0.36	28	42	14	0.6	4	190
H352-01004	0.9	34	0.4	30	18	10	0.6	6	190

**Mechanical Dimensions**

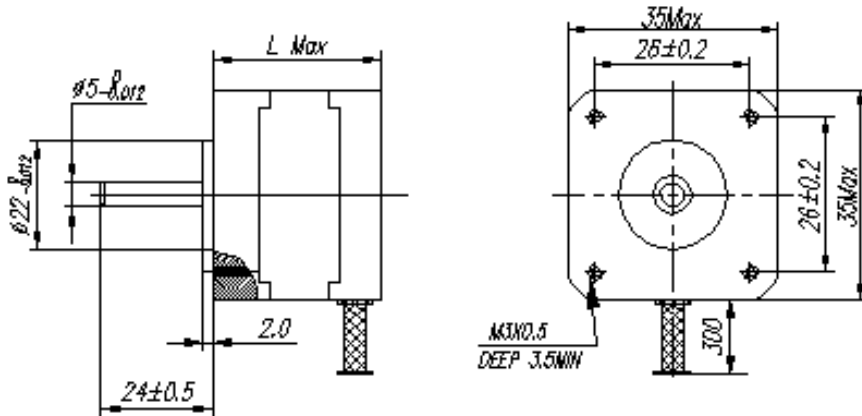


**Standard Leadwire Configuration**

**BI-POLAR(4 LEADS)**



**UNI-POLAR(6 LEADS)**



**Complementary Products:**

- Special shaft
- Encoders
- Connector
- Long leadwires