


# UV Lamp (UV600) Weathering Chamber




Mobile phone scan  
More product information

## Energy Conservation

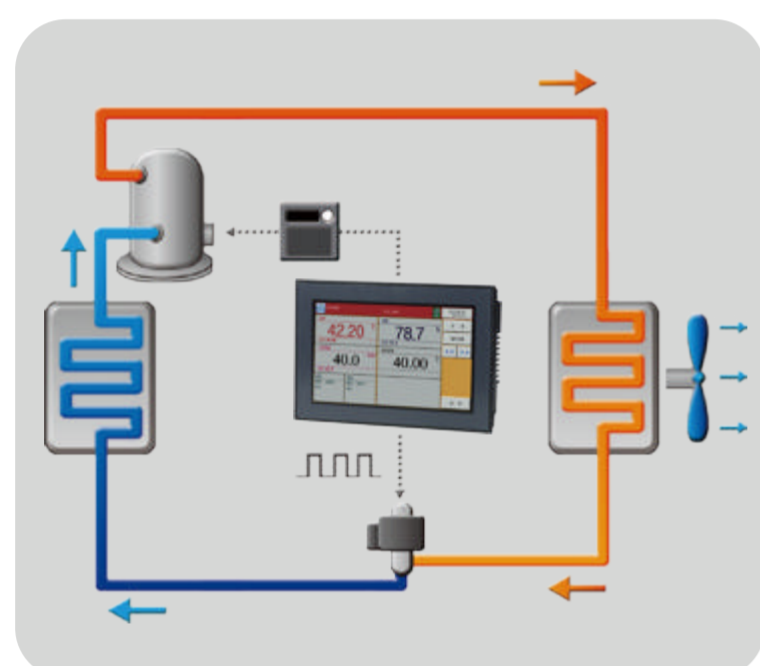

## Remote network system

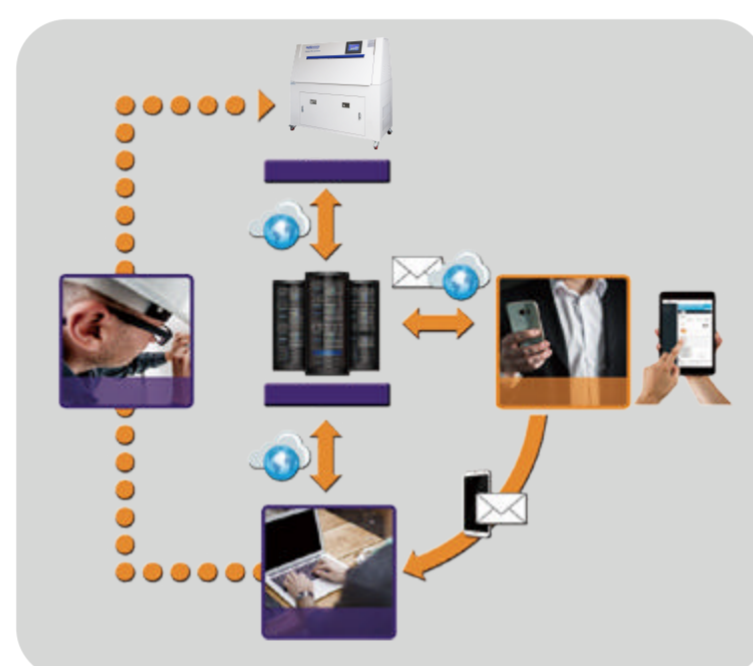

## Circuit System



### • Specifications

Model		SM-UV600-C
Temperature	Temperature control range	30.0℃~70.0℃
	Temperature fluctuation	±1.0℃
	Temperature uniformity	±2.0℃
Humidity	Humidity control range	90.0%RH~98.0%RH(Temperature range: 30.0℃~70.0℃)
	Humidity fluctuation	±1.0% RH
	Humidity uniformity	±3.0%RH
Lighting	Lamp type	UV-A、UV-B
	Wavelength	UV-A (280~315nm) 40±10%W/m <sup>2</sup> 、UV-B: (315~400nm) 40±10%W/m <sup>2</sup>
	Lamp quantity	8Pcs
	Distance between tubes center	70±2mm
	Distance between tubes center and testing samples	50±2mm
	Lamp lifespan	1200H
	Nozzle quantity	12Pcs
Material / Components	Sample size	W450*H260±2mm
	Internal material	Stainless steel(SUS304)
	External material	Stainless steel(SUS304)
	Heat insulating material	50mm thickness mineral wool
	Fan	Axial flow fan
Size	Humidifier	Steam humidifier
	Inner size(mm) W*H*D	1170*500*450
	Outer size(mm) W*H*D	1300*1550*650
Operating ambient temperature		+5 ~ 35℃
Power supply		220V AC 50/60Hz
Controller		South korea SAMWONTECH TEMI880 5.7 inch controller, equipped with RS232 port

※Please consult the sales for specific technical parameters, SANWOOD reserves the right of explanation.

**Sanwood (HK) Industrial Corporation.,limited**  
**Guangdong Sanwood Technology Corporation.,limited**

ADD: No.88, Songchang Road, Songbotang , Changping, Dongguan, Guangdong  
TEL: +86+769-81182799  
FAX: +86+769-82987199  
E-mail: info@sanwood.cc  
www.sanwood.cc  
www.climatic-chambers.com



Mobile phone scan  
can visit our official website