

APPLICATION

- ATM in Bank,
- Automatic window bind,
- Medical instrument,
- Cosmetology instrument,
- IT Mechanism,
- Security cameras

PICTURES



GEARBOX MOTOR SPECIFICATION


Type	Ratio		1:3.4	1:6	1:14	1:23	1:33	1:51	1:86	1:111	1:190	1:246	1:315	1:531	1:707	1:913	1:1180	1:1525	1:1972
D223	Rated torque	kg.cm	0.05	0.07	0.15	0.25	0.36	0.5	0.8	1	1.7	2	3	5	5	6	6	6	6
	Rated speed	rpm	1650	1100	471	287	200	129	77	59	35	27	21	12	9	7	6	4	3
Gearbox	Instantaneous torque	Kg.cm	3		4			5			7			8					
	Allowable torque	Kg.cm	2		3			4			5			6					
	Length	mm	18.1		23.4			28.7			34			39.3					
	Backlash	O	0.5		0.6			0.8			1			1.5					
	Weight	g	40		55.2			68.2			84.2			96.2					

MOTOR DATA

Frames volt (V)	No road speed (rpm)	Noroad current (mA)	Rated torsion (g.cm)	Rated speed (rpm)	Rated current (mA)	Output power (w)	Weight (g)
1A8K4-12	8400	95	21	6600	292	1.6	32

Note: Product voltage, output shaft size, electrical performance, you can request custom-made!

MOTOR CHARACTERISTICS

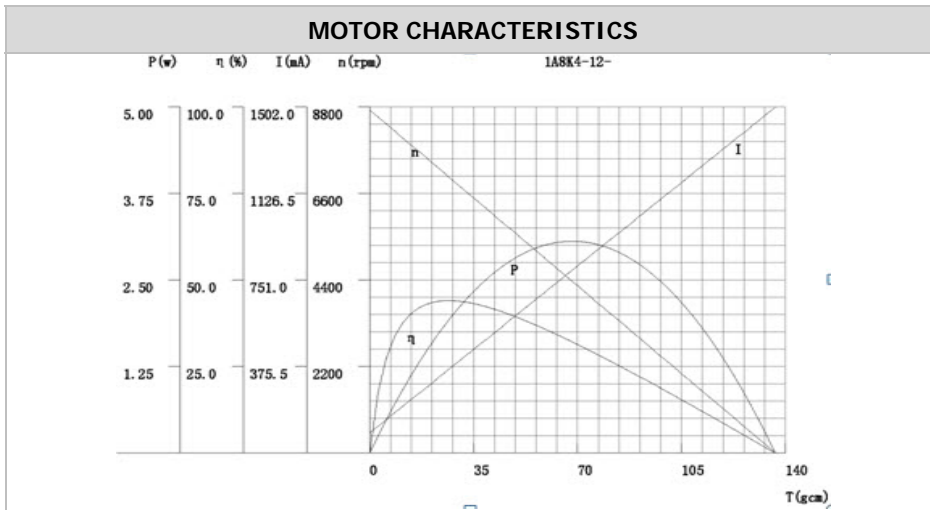

MECHANICAL DIMENSIONS

