



# xLED-165100 Passive Pin Fin Heatsink Ф165mm

## **Features VS Benefits**

- \* Mechanical compatibility with direct mounting of the SMD products to the LED cooler and thermal performance matching the lumen packages.
- \* For flood light, street light and high bay designs from 6,000 to 15,000 lumen.
- \* Thermal resistance range Rth 0.42°C/W.
- \* Product size: Diameter 165mm Standard height 100mm, Other widths on request.
- \* Forged from highly conductive aluminium for optimal thermal performance (AL1070), aluminium 1070 thermal conductivity is 2.0 times higher than ADC12.
- \* 2 standard colors clear anodised black anodised
- \* Waterproof level designs from IP65 to IP67.
- $^{\star}$  With the SMD products (3030 , 2835 , 5050......): Bridgelux , Cree , Edison , Citizen , LG Innotek Lumileds, Luminus, Lumens, Nichia, Osram, Prolight Opto, Seoul, Samsung, Sharp.

#### The LED engine and radiator assembly directly Mounting Options

- \* Below you find an overview of SMD products which standard fit on the xLED series coolers.
- \* In this way mechanical after work and related costs can be avoided, and lighting designers can standardize their designs on a limited number of LED coolers.

## Waterproof connectors & Driver









## Mingfa tech product number

- MEAN WELL: HBG-100 Series

#### **Order Information**

Example:xLED-165100-B Example:xLED-165100 -



**Anodising Color** 

**B-Black** 

C-Clear

**Z-Custom** 

### **Notes:**


- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MingfaTech.
- MingfaTech reserves the right to change products or specifications







## **Drawings & Dimensions**

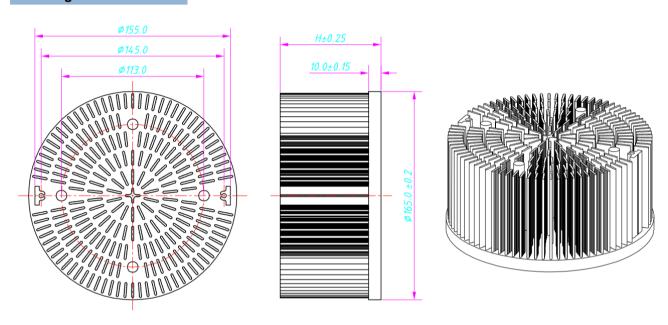

## Product deta table












# xLED-165100 Passive Pin Fin Heatsink Φ165mm


#### The thermal data table

- \* Please be aware the dissipated power Pd is not the same as the electrical power Pe of a LED module.
- \*To calculate the dissipated power please use the following formula:  $Pd = Pe \times (1-\eta L)$ .
  - Pd Dissipated power; Pe Electrical power; nL = Light effciency of the LED module;

Pd = Pe x (1-ηL)		Heat sink to ambient thermal resistance Rhs-amb (°C/W)	Heat sink to ambient temperature rise Ths-amb (°C)
		xLED-165100	
Dissipated Power Pd(W)	30.0	0.60	18.0
	60.0	0.48	29.0
	90.0	0.44	40.0
	120.0	0.42	50.0
	150.0	0.41	61.0

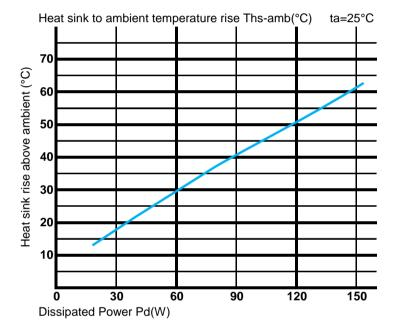

\*The aluminum substrate side of the package outer shell is thermally connected to the heat sink via TIM (Thermal interface MingFa recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, A thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended.



\*Thermal resistance is a heat property and a measurement of a temperature difference by which an object or material resists a heat flow.

Geometric shapes are different, the thermal resistance is different.

Formula:  $\theta = (Ths - Ta)/Pd$ 

- θ Thermal Resistance [°C/W]; Ths Heatsink temperature; Ta Ambient
- \*The thermal resistance between the junction section of the light-emitting diode and the aluminum substrate side of the package outer shell is  $R_{\text{junction-case}}$ , the thermal of the TIM outside the package is R<sub>interface (TIM)</sub> [°C/W], the thermal resistance with heat sink is R<sub>heatsink-ambient</sub> [°C/W], and the ambient temperature is T<sub>ambient</sub> [°C].
- \*Thermal resistances outside the package  $R_{\text{interface}\,(TIM)}$  and  $R_{\text{heatsink-ambient}}$  can be into the thermal resistance  $R_{\text{case-ambient}}$  at this point. Thus, the following formula is also used:

 $T_{junction} = (R_{junction-case} + R_{case-ambient}) \cdot Pd + T_{ambient}$ 

