

GOOLED

GooLED-SEO-5850 Pin Fin Heat Sink Φ58mm for Seoul

Features VS Benefits

- * The GooLED-SEO-5850 Seoul Pin Fin LED Heat Sinks are specifically designed for luminaires using the Seoul LED engines.
- * Mechanical compatibility with direct mounting of the LED engines to the LED cooler and thermal performance matching the lumen packages.
- * For spotlight and downlight designs from 800 to 2,100 lumen.
- * Thermal resistance range Rth 3.85°C/W.
- * Modular design with mounting holes foreseen for direct mounting of Seoul COB series and AC Modules.
- * Diameter 58.0mm standard height 50.0mm, Other heights on request.
- * Forged from highly conductive aluminum.

Zhaga LED engine and radiator assembly is a unified future international standardization


- * Below you find an overview of Seoul COB's and LED modules which standard fit on the Pin Fin LED Heat Sinks.
- * In this way mechanical after work and related costs can be avoided, and lighting designers can standardize their designs on a limited number of LED Pin Fin LED Heat Sink.











Seoul LED Modules directly Mounting Options

 Seoul COB Series, Size 13.5x13.5mm.

 SAW80661A;
 SDW01F1C;

 SAW90661A;
 SDW81F1B;

 SAW810xxx;
 SDW81F1C;

With the Zhaga Book 11 holders for the green indicator marks. BJB holder: 47.319.6294.50; AAG.STUCCHI: 8100-G2 Without the holders for the pink indicator marks. Direct mounting with machine screws M3x6.5mm.

With the LEDiL products: Olivia series: FN14637-S

Ronda series: FN15972-xxx; FN15971-xxx; FN15969-xxx;

Seoul COB Series, Size 19×19mm.

SDW02F1C; SDW82F1C; SDW83F1C; SDW83F1C;

SDW92F1C;

With the Zhaga Book 3 holders for the blue indicator marks. BJB holder: 47.319.2021.50; AAG.STUCCHI: 8101-G2 Without the holders for the red indicator marks.

Direct mounting with machine screws M3x6.5mm

Olivio perioe: FN14627 St. F

Olivia series: FN14637-S; FN14828-M;

Ronda series: FN15xxx-xx

AC LED Modules, Size Φ46mm.

SMJE-2D08W4PD; SMJD-3D08W4PD; SMJE-2D08W4PE; SMJD-3D08W4PE; SMJE-2D12W4PD; SMJD-3D12W4PD; SMJE-2D12W4PE; SMJD-3D12W4PE;

Direct mounting with 3 screws M2x6.5mm.

Yellow indicator marks.







GooLED-SEO-5850 Pin Fin Heat Sink Φ58mm for Seoul

Mounting Options and Drawings & Dimensions

Example:GooLED-SEO-5850-B-1,2

Example:GooLED-SEO-58 1 - 2

T 1123 14 (222)

1 Height (mm)

Anodising Color

B-Black

C-Clear

Z-Custom

Mounting Options - see graphics for details Combinations available


Ex.order code - 12

means option 1 and 2 combined

Notes:

- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MingfaTech.
- MingfaTech reserves the right to change products or specifications without prior notice.

MOUNTING OPTION	Module type	Holder NO.	LEDiL products		THREAD	THREAD	THREAD HOLE
			Olivia series	Ronda series	ITIKEAD	DEPTH	DISTANCE
1	COB Size 13.5×13.5mm	/	FN14637-S;	FN15972-xxx; FN15971-xxx; FN15969-xxx;	M3	6.5mm	19.0mm/ 2-@180°
2		BJB Holder 47.319.2021.50			МЗ	6.5mm	25.0mm/ 2-@180° (Zhaga book 11)
2		AAG.STUCCHI 8101-G2					
3	COB Size 19×19mm	/	FN14637-S; FN14828-M;	FN15xxx-xx;	M3	6.5mm	26.8mm/ 2-@180°
4		BJB Holder 47.319.2021.50			МЗ	6.5mm	35.0mm/ 2-@180° (Zhaga book 3)
		AAG.STUCCHI 8101-G2					
5	AC Module	/	/	1	M2	6.5mm	43.0mm/ 3-@120°

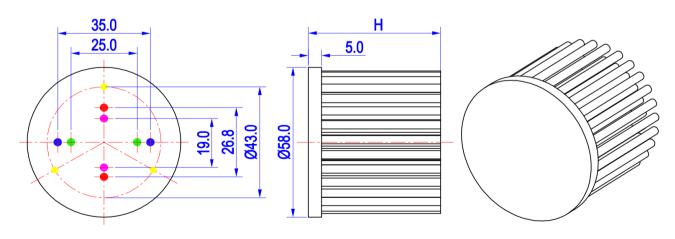



The product deta table




Model No.	GooLED-SEO-5850		
Heatsink Size	Ф58xH50mm		
Heatsink Material	AL1070		
Finish	Black Anodized		
Weight (g)	108.0		
Dissipated power (Ths-amb,50℃)	13.0 (W)		
Cooling surface area (mm²)	36775		
Thermal Resistance (Rhs-amb)	3.85 (°C/W)		

The thermal data table


- * Please be aware the dissipated power Pd is not the same as the electrical power Pe of a LED module.
- *To calculate the dissipated power please use the following formula: $Pd = Pe \times (I \eta L)$.
 - Pd Dissipated power ; Pe Electrical power ; $\eta L = \text{Light effciency of the LED module};$

Pd = Pe x (1-ηL)		Heat sink to ambient thermal resistance Rhs-amb (°C/W)	Heat sink to ambient temperature rise Ths-amb (°C)	
		GooLED-SEO-5850		
Dissipated Power Pd(W)	3.0	5.00	15.0	
	6.0	4.67	28.0	
	9.0	4.33	39.0	
	12.0	4.00	48.0	
	15.0	3.80	57.0	

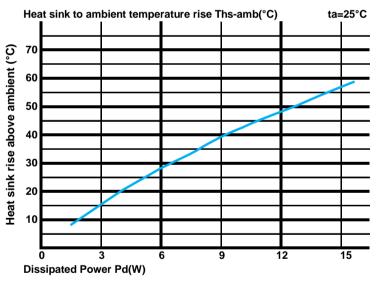

- *The aluminum substrate side of the package outer shell is thermally connected to the heat sink via TIM (Thermal interface material).
- $\label{thm:mingFa} \mbox{MingFa recommends the use of a high thermal conductive interface between the LED module and the LED cooler.}$

 $Either thermal\ grease, A\ thermal\ pad\ or\ a\ phase\ change\ thermal\ pad\ thickness\ 0.\ I-0.\ I\ 5mm\ is\ recommended.$



- *Thermal resistance is a heat property and a measurement of a temperature difference by which an object or material resists a heat flow. Geometric shapes are different, the thermal resistance is different. Formula: $\theta = (Ths Ta)/Pd$
- θ Thermal Resistance [°C/W] ; Ths - Heatsink temperature ; Ta - Ambient temperature ;
- *The thermal resistance between the junction section of the light-emitting diode and the aluminum substrate side of the package outer shell is $R_{junction-case}$, the thermal resistance of the TIM outside the package is $R_{interface}$ (TIM) [°C/M], the thermal resistance with the heat sink is $R_{heatsink-ambient}$ [°C/M], and the ambient temperature is $T_{ambient}$ [°C/].
- *Thermal resistances outside the package $R_{interface\,(TIM)}$ and $R_{heatsink-ambient}$ can be integrated into the thermal resistance $R_{case-ambient}$ at this point. Thus, the following formula is also used:

 $T_{junction} = (R_{junction-case} + R_{case-ambient}) \cdot Pd + T_{ambient}$

