

SimploLED

SimploLED-VOS-8180 Vossloh-Schwabe Modular Passive LED Cooler Φ


Features VS Benefits

- * The SimploLED-VOS-8180 Vossloh-Schwabe Modular Passive LED Coolers are specifically designed for luminaires using the Vossloh-Schwabe LED engines.
- * Mechanical compatibility with direct mounting of the LED engines to the LED cooler and thermal performance matching the lumen packages.
- * For spotlight and downlight designs from 900 to 3800 lumen.
- * Thermal resistance range Rth 1.6°C/W.
- * Modular design with mounting holes foreseen for direct mounting of Vossloh-Schwabe LUGA Shop LED engines.
- * Diameter 81mm - standard height 80mm Other heights on request.
- * Extruded from highly conductive aluminum.



Zhaga LED engine and radiator assembly is a unified future international standardization

- * Below you find an overview of Vossloh-Schwabe engines COB's and LED modules which standard fit on the SimploLED coolers.
- * In this way mechanical after work and related costs can be avoided, and lighting designers can standardize their designs on a limited number of LED coolers.

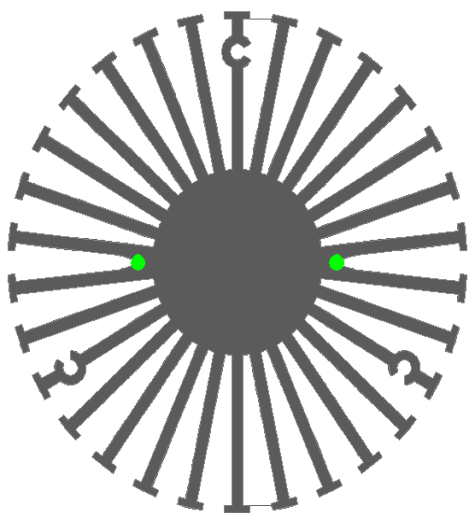

Vossloh-Schwabe LED engines Mounting Options

For the LUGA Shop 2014 Module.

WU-M-484-827;	WU-M-484-840;	WU-M-485-835;	WU-M-486-830;
WU-M-484-830;	WU-M-485-827;	WU-M-485-840;	WU-M-486-835;
WU-M-484-835;	WU-M-485-830;	WU-M-486-827;	WU-M-486-840;

For the LUGA Shop 2014 PW Module.

WU-M-484-831-PW;	WU-M-485-831-PW;	WU-M-486-831-PW;
------------------	------------------	------------------

For the LUGA Shop 2014 HiCRI LED Module.

WU-M-484-927;	WU-M-484-940;	WU-M-485-935;	WU-M-486-930;
WU-M-484-930;	WU-M-485-927;	WU-M-485-940;	WU-M-486-935;
WU-M-484-935;	WU-M-485-930;	WU-M-486-927;	WU-M-486-940;

For the LUGA Shop 2014 PW Module.

WU-M-484-931-PW;	WU-M-485-931-PW;	WU-M-486-931-PW;
------------------	------------------	------------------

For the LUGA Shop 2014 FOOD LED engines and the holder.

WU-M-486-Ga30;	WU-M-486-Ga40;	WU-M-486-Meat;	WU-M-486-SMeat;
----------------	----------------	----------------	-----------------

For the LUGA Shop 2014 PCB LED engines and the holder.

DMS088C27E1;	DMS088C40E1;	DMS158C35E1;	DMS128C30E1;
DMS088C30E1;	DMS158C27E1;	DMS158C40E1;	DMS128C35E1;
DMS088C35E1;	DMS158C30E1;	DMS128C27E1;	DMS128C40E1;

For the LUGA Shop 2014 PCB PW LED engines and the holder.

DMS088C31EP1;	DMS128C31EP1;	DMS158C31EP1;
---------------	---------------	---------------

For the LUGA Shop 2014 PCB HiCRI LED engines and the holder.

DMS088D27E1;	DMS088D40E1;	DMS158D35E1;	DMS128D30E1;
DMS088D30E1;	DMS158D27E1;	DMS158D40E1;	DMS128D35E1;
DMS088D35E1;	DMS158D30E1;	DMS128D27E1;	DMS128D40E1;

For the LUGA Shop 2014 PCB PW LED engines and the holder.

DMS088D31EP1;	DMS128D31EP1;	DMS158D31EP1;
---------------	---------------	---------------

For the LUGA Shop 2014 PCB FOOD LED engines and the holder.

DMS158G30E1;	DMS158G40E1;	DMS158P40E1;	DMS158P19E1
--------------	--------------	--------------	-------------

For the LUGA C 2015 LED engines.

(AAG.STUCCHI holder:8101-G2); (BJB holder:47.319.2021.50);

DMC104Cxxx;	DMC115Cxxx;	DMC118Cxxx;
-------------	-------------	-------------

Zhaga Book3 Green indicator marks:
Mounting with machine screws M3x6mm;
Please refer to the "www.vossloh-schwabe.com" data provided on the manual.

SimploLED

SimploLED-VOS-8180 Vossloh-Schwabe Modular Passive LED Cooler Φ

Mounting Options and Drawings & Dimensions

Example: SimploLED-VOS-8180-B-3

Example: SimploLED-VOS-81 **1** - **2** - **3**

- 1** Height (mm)
- 2** Anodising Color
B-Black
C-Clear
Z-Custom
- 3** Mounting Options - see graphics for details Combinations available
Ex.order code - 12
means option 1 and 2 combined





A. A. G.
STUCCHI
ideas are made of light

Notes:

- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MingfaTech.
- MingfaTech reserves the right to change products or specifications without prior notice.


MOUNTING OPTION	Module type	Holder NO.	THREAD	THREAD DEPTH	THREAD HOLE DISTANCE
1	LUGA C	BJB (47.319.2021.50)	M3	6mm	35.0mm/ 2-@180°
		AAG.STUCCHI (8101-G2)			
	LUGA Shop 2014 PCB	Vossloh-Schwabe			
	LUGA Shop 2014	/			

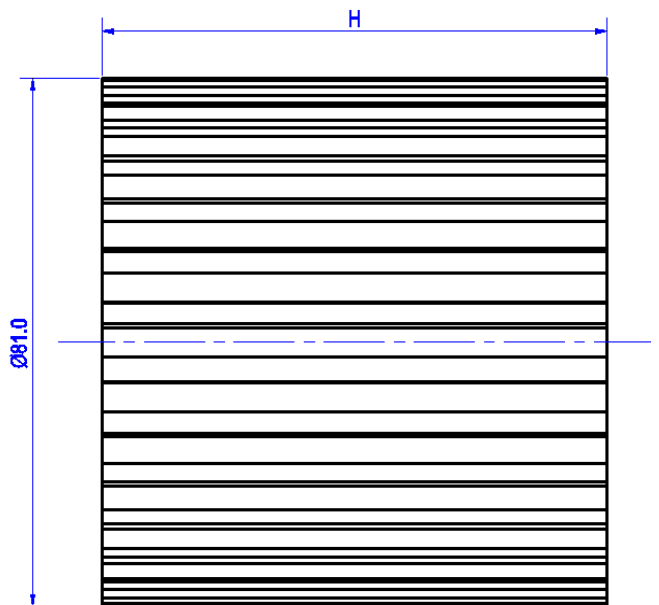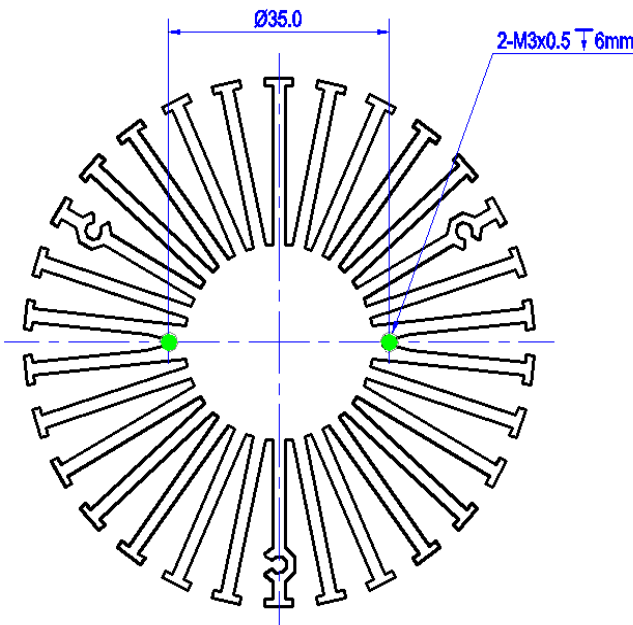

SimpLED

SimpLED-VOS-8180 Vossloh-Schwabe Modular Passive LED Cooler Φ

The thermal data table

	 <i>SimpLED-8180</i>
Model No.	SimpLED-VOS-8180
Size	Φ81xH80mm
Material	AL6063-T5
Finish	Black Anodized
Weight(gr)	508.0
Thermal Wattage	31.2W
HeatsinkOs-a²	148406
Heat Sink T_{Rise Above Ambient}	1.6

Dissipated Power Pd(W)	Pd = Pe x (1- η L)		Heat sink to ambient thermal resistance Rhs-amb (°C/W)	Heat sink to ambient temperature rise Ths-amb (°C)
	7.0	14.0	2.14	15.0
			SimpLED-VOS-8180	SimpLED-VOS-8180
	14.0		1.82	25.5
	21.0		1.66	35.0
	28.0		1.53	43.0
	30.0		1.72	50.7

